


# HDS 160

Discharge : 250mm / 10 Inch  
 Power : 103KW / 140 HP  
 Hydraulic 160cc Piston Motor  
 Low Speed - Low Wear






Pressure + Return Line 1 1/4" Flange 6000 PSI

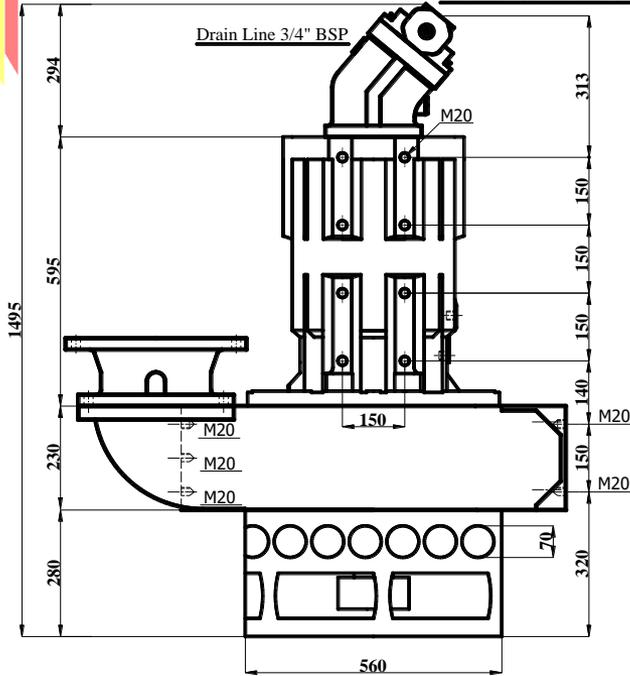

RPM	Q m <sup>3</sup> /h	H meter	KW - HP	Operating Pressure BAR	Oil Flow l/min
1000	600	16	70 - 95	260	170
1150	700	20	90 - 122	290	194
1250	780	22	103 - 140	300	210

CONTINUOUS DUTY AT LOW SPEEDS  
 IMPELLER WIDTH 80mm - STRAINER 70mm  
 WEAR PARTS CHROM CASTING 27% Cr  
 SHAFT TEMPERED STAINLESS AISI T-431 DIN 1-4057  
 TORQUE 2,6 Nm / BAR  
 MOTOR DISPLACEMENT 163,9cc  
 MAX CONTINUOUS OIL PRESSURE 430 BAR  
 EXCAVATOR MOUNTING PADS  
 2K - PAINT  
 WEIGHT 900 KG

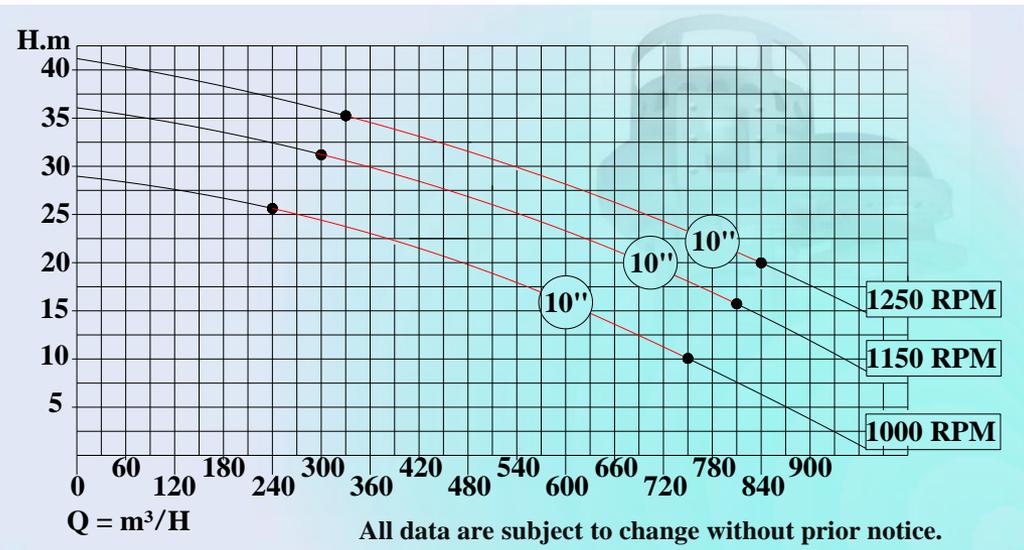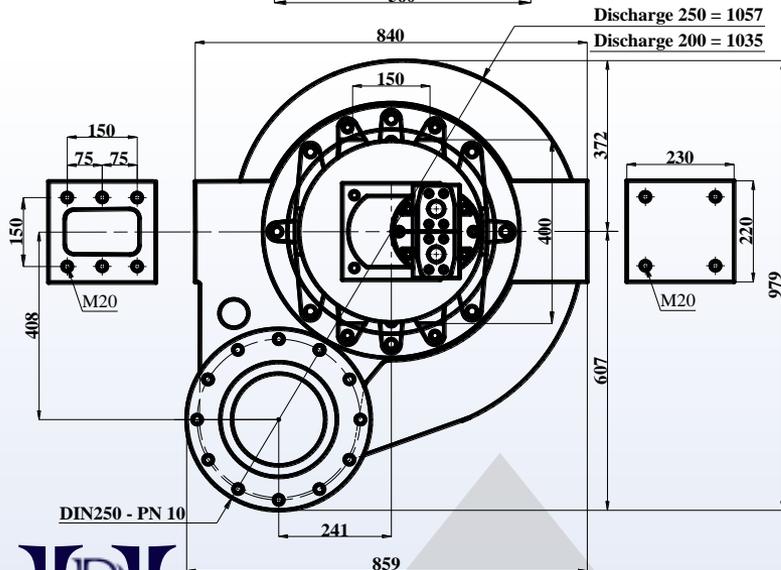

All data are subject to change without prior notice.