
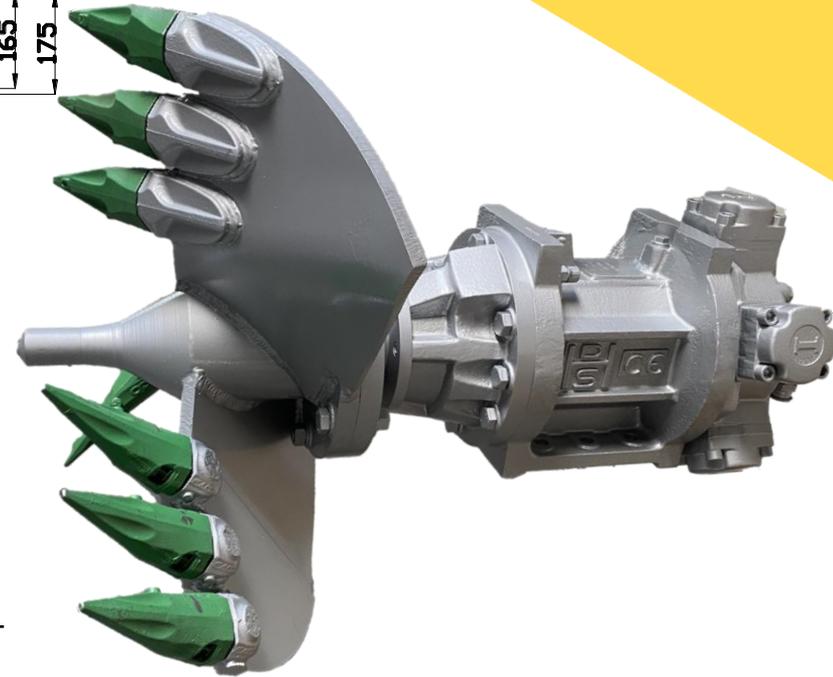


# EXHYC 4200

Excavator/Cutter head -Hydraulic Driven  
 Diameter Head Ø800mm - 9 Teeth  
 Radial Piston Motor 1116cc  
 4200Nm at Min Speed 50RPM

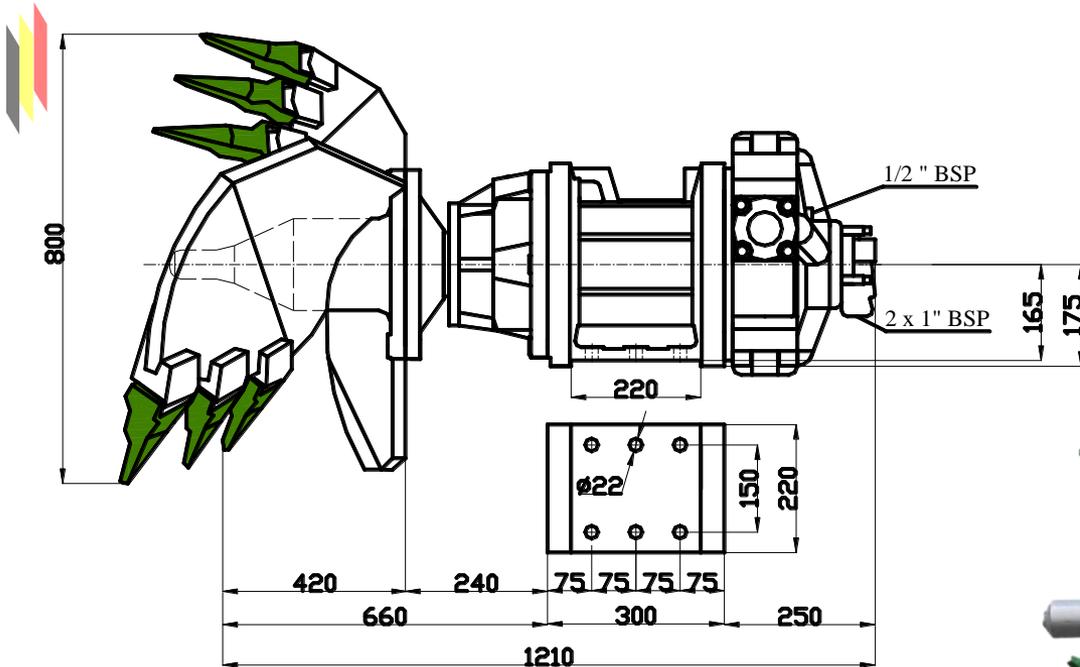

COMPACT SOIL 50 – CLAY 75 – MIXING 100 RPM.  
 HEAVY DUTY CONSTRUCTION. DIAMIX – HD 480 SHAFT SLEEVE.  
 OVERSIZED BEARINGS. OIL FILLED HOUSING.  
 SEAL PROTECTION WEAR PLATE WITH WATER FLUSH CONNECTION.  
 2C PAINT.

KOMPAKTES SAND 50 – LEEM 75 – MISCHEN 100 UPM.  
 SCHWERAUSFUHRUNG. DIAMIX – HD 480 WELLENSCHUTZHUELSE.  
 UBERDIMENSIONIERTE LAGER. OELGEFULT GEHAUSE.  
 SCHLEISSPLATTE MIT SPERWASSERANSCHLUSS.  
 2K FARBE.

SABLE COMPACT 50 – ARGILE 75 – MIXAGE 100 T/MIN.  
 CONSTRUCTION ROBUSTE. CHEMISE D'ARBRE EN DIAMIX – HD 480.  
 ROULEMENTS SURDIMENSIONNES. BAIN D'HUILE.  
 PLAQUE D'USURE AVEC RACCORDEMENT EAU DE BARRAGE.  
 PEINTURE 2C.

EXHYC 4200 CONTINUOUS DUTY DAUERBETRIEB SERVICE CONTINU 250 BAR/4200 Nm	UPM – RPM – T/Min	50	75	100
	KW	23	35	47
	ÖL – OIL – HUILE L/Min	56	84	112
	KG	380		
1116cc Radial Piston Motor				
SPT : N-Value 55 = Cohesion Factor 5000 Gr/cm <sup>2</sup>				