




EXHYC 4500

Excavator/Cutter head -Hydraulic Driven
 Diameter Head Ø1000mm – 18 Teeth
 Radial Piston Motor 1116cc
 4200Nm at Min Speed 40RPM

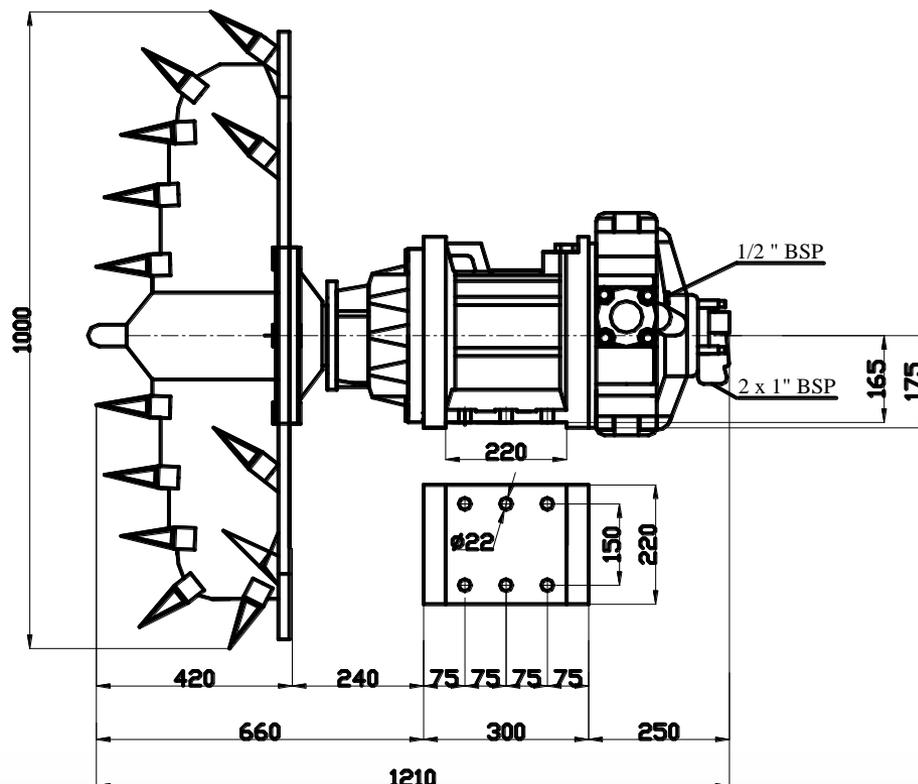

COMPACT SOIL 40 – CLAY 60 – MIXING 80 RPM.
 HEAVY DUTY CONSTRUCTION. DIAMIX – HD 480 SHAFT SLEEVE.
 OVERSIZED BEARINGS. OIL FILLED HOUSING.
 SEAL PROTECTION WEAR PLATE WITH WATER FLUSH CONNECTION.
 2C PAINT.

KOMPAKTES SAND 40 – LEEM 60 – MISCHEN 80 UPM.
 SCHWERAUSFUHRUNG. DIAMIX – HD 480 WELLENSCHUTZHUELSE.
 UBERDIMENSIONIERTE LAGER. OELGEFULT GEHAUSE.
 SCHLEISSPLATTE MIT SPERWASSERANSCHLUSS.
 2K FARBE.

SABLE COMPACT 40 – ARGILE 60 – MIXAGE 80 T/MIN.
 CONSTRUCTION ROBUSTE. CHEMISE D'ARBRE EN DIAMIX – HD 480.
 ROULEMENTS SURDIMENSIONES. BAIN D'HUILE.
 PLAQUE D'USURE AVEC RACCORDEMENT EAU DE BARRAGE.
 PEINTURE 2C.



EXHYC 4500 CONTINUOUS DUTY DAUERBETRIEB SERVICE CONTINU 250 BAR/4500 Nm SPT : N-Value 55 = Cohesion Factor 5000 Gr/cm ²	UPM – RPM – T/Min	40	50	60	70	80
	KW	19	23	28	33	38
	ÖL – OIL – HUILE L/Min	45	56	67	78	90
	KG	480				
	1116cc Radial Piston Motor					

All data are subject to change without prior notice.

WEBSITE : www.hdsbelgium.com
www.dredgingpumps.eu

E – mail : hds@hdsbelgium.com