
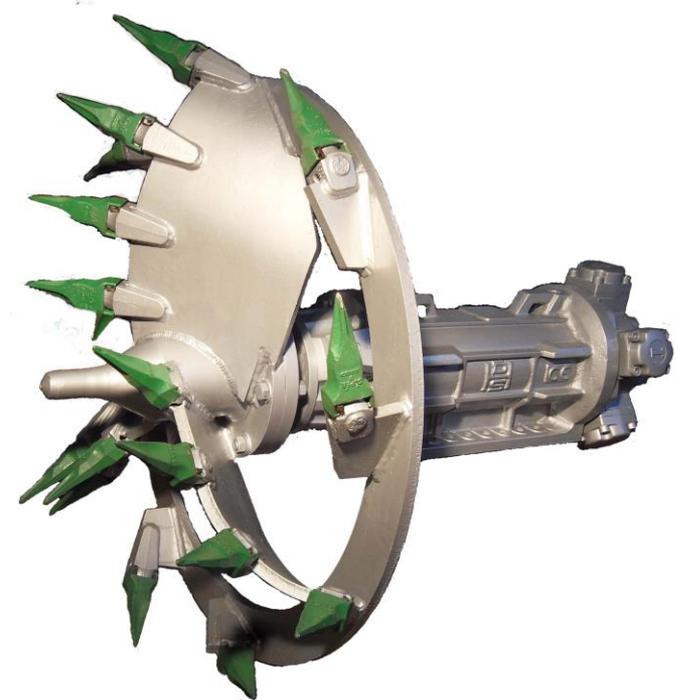


EXHYL 5000

Excavator/Cutter head -Hydraulic Driven
 Diameter Head Ø1200mm – 21 Teeth
 Radial Piston Motor 1332cc
 5000Nm at Min Speed 35RPM

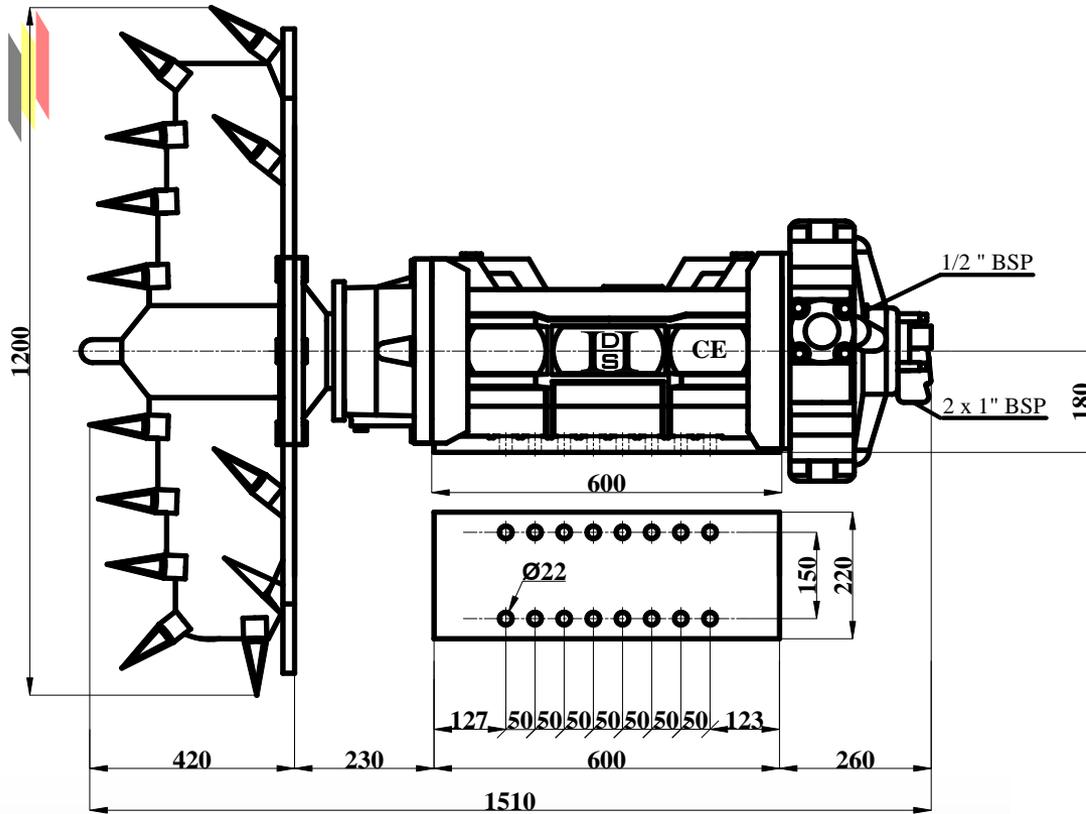

COMPACT SOIL 35 – CLAY 50 – MIXING 65 RPM.
 HEAVY DUTY CONSTRUCTION. DIAMIX – HD 480 SHAFT SLEEVE.
 OVERSIZED BEARINGS. OIL FILLED HOUSING.
 SEAL PROTECTION WEAR PLATE WITH WATER FLUSH CONNECTION.
 2C PAINT.

KOMPAKTES SAND 35 – LEEM 50 – MISCHEN 65 UPM.
 SCHWERAUSFUHRUNG. DIAMIX – HD 480 WELLENSCHUTZHUELSE.
 UBERDIMENSIONIERTE LAGER. OELGEFULT GEHAUSE.
 SCHLEISSPLATTE MIT SPERWASSERANSCHLUSS.
 2K FARBE.

SABLE COMPACT 35 – ARGILE 50 – MIXAGE 65 T/MIN.
 CONSTRUCTION ROBUSTE. CHEMISE D'ARBRE EN DIAMIX – HD 480.
 ROULEMENTS SURDIMENSIONES. BAIN D'HUILE.
 PLAQUE D'USURE AVEC RACCORDEMENT EAU DE BARRAGE.
 PEINTURE 2C.

EXHY 5000 CONTINUOUS DUTY DAUERBETRIEB SERVICE CONTINU 250 BAR/5000 Nm SPT : N-Value 55 = Cohesion 5000 Gr/cm ²	UPM – RPM – T/Min	35	40	50	60	65
	KW	20	23	28	34	36
	ÖL – OIL – HUILE L/Min	47	54	67	80	87
	KG	600				
	1332cc Radial Piston Motor					

All data are subject to change without prior notice.

WEBSITE : www.hdsbelgium.com
www.dredgingpumps.eu

E – mail : hds@hdsbelgium.com